




## LCD Display 300W Rechargeable Portable Power Station Solar Outdoor Emergency Power Supply

Our Product Introduction

for more products please visit us on [evstationcharger.com](http://evstationcharger.com)

### Basic Information

- Place of Origin: China
- Brand Name: MINKO
- Certification: CE, ROHS
- Model Number: Portable Power Station-M300
- Minimum Order Quantity: 5 pieces
- Price: negotiation
- Packaging Details: L210xW85xH52 (mm)
- Delivery Time: 8 -10 working days
- Payment Terms: T/T, Western Union, MoneyGram, Paypal, Skrill, Transferwise
- Supply Ability: 1000000 pieces per month

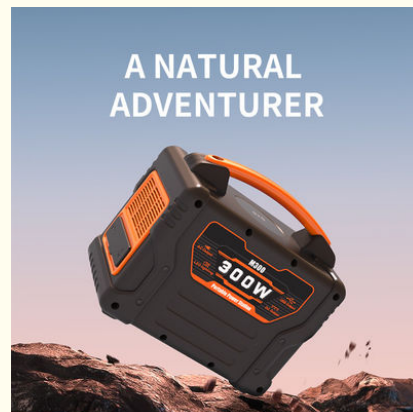

### Product Specification

- Rated Power AC: 300W
- Capacity: 266.4Wh
- Power Indicate: LCD Display LCD
- Solar Charging Input: 18-23V/3A(60W Max)
- Wireless Charge Output: 10W
- Discharging Temperature Range: 14~104°F(-10~40°C )
- Housing Material: ABS+PC
- Operation Humidity: 10%~90%
- Highlight: 300w emergency portable power station, Rechargeable Portable Power Station 72000mAh, Rechargeable Portable Power Station 266.4Wh



### More Images



## Product Description

### LCD Display 300W Rechargeable Portable Power Station Solar Outdoor Emergency Power Supply

#### Description of Portable Power Station

Portable power station is equipped with 300Wh lithium-ion battery pack, which contains upgraded chip, supports fast charging function and more than 1000 recycling times. Pure Sine Wave technology AC outlets deliver stable and safe power, without damage and reduces audible and electrical noise.

**Apply to:** Home emergency, small household appliances, digital products (such as UAV, mobile phone, computer, notebook, camera, handheld head, car refrigerator, etc.), long-distance self-driving travel, outdoor camping, lighting, picnic, wild fishing, environmental monitoring, geological exploration, car electricity, medical equipment and other scenes.

#### Product Specification

Rated Power AC	300W
Capacity	266.4Wh (22.2V/12Ah or 3.7V/72000mAh)
Battery type	UL Li-ion
Power Indicate	LCD display
LCD Display	Battery remaining capacity, Battery fault, total output power, Over temperature, input power
DC Input	DC15V/4A(60W max, adapter with UL, CCC, CE, PSE, FCC)
DC fully Charging Time	About 5~6H
Solar Controller Model	MPPT
Solar Charging Input	18-23V/3A(60W max)
Charging Temperature Range	32~104°F(0°C~40°C)
USB Output	Type-C output: PD 60W(5V3A, 9V3A, 12V3A, 15V3A, 20V3A)*1 USB output: QC3.0(18W/5V3A, 9V2A, 12V1.5A)*3(total 54W)
Wireless Charge Output	10W
Cigarret Lighter output	12V/10A(120W)
DC output	12V/5A/DC5521*2(total 120W)
LED light	5W*2(total 10W Max) SOS, flashlight
AC Output	Output waveform: pure sinewave
	Output voltage: 110V(US/JP) or 220V(EU/UK/AU/CN) (AC output voltage and frequency are customized, according to different countries and regions. Please refer to the actual product)
	Output frequency: 50/60Hz
	Peak AC output: 600W AC continuous output: 300W
Discharging Temperature Range	14~104°F(-10~40°C)
Product size/Weight	273*181*244mm/about 3.95kg
Carton Size/Weight	59*30*32CM/about 17Kg/3PCS
Protections	over-charging, short-circuit, low-voltage, over-temperature and over-discharging protection
Color	Oranger+gray, Blue+gray, Red+gray, Green+gray
Housing Material	ABS+PC ( fireproofing V0)
Working Temperature	-15~45°C
Operation Humidity	10%~90%
Standard Package Include	1*M300 portable power supply, 1*60W power supply, 1*User Manual, ,color box packaging, 1*MC4 charging cable, 1*vehicle charging cable
Warranty	12 months

#### 9 Protections Strictly Abide By Charging Safety

Overcurrent protection  
Short-circuit protection  
Over discharge protection  
Low temperature protection  
High temperature protection  
Overvoltage protection  
Overload protection  
Signal interference protection  
Overcharge protection

**Level 9 shockproof.  
challenging the limit**



**UL certified car gauge  
grade Li-ion battery**



**Portable hand-held  
for outdoor protection**




**5~6 hours full charge**



# VEHICLE GRADE TERNARY LITHIUM BATTERY

USING LITHIUM BATTERY, UL CERTIFIED HIGH-RATE  
BATTERY CELLS ARE STABLE AND EXPLOSION-PROOF AND SAFER

**800** CYCLES REMAINING POWER  $\geq$  80%

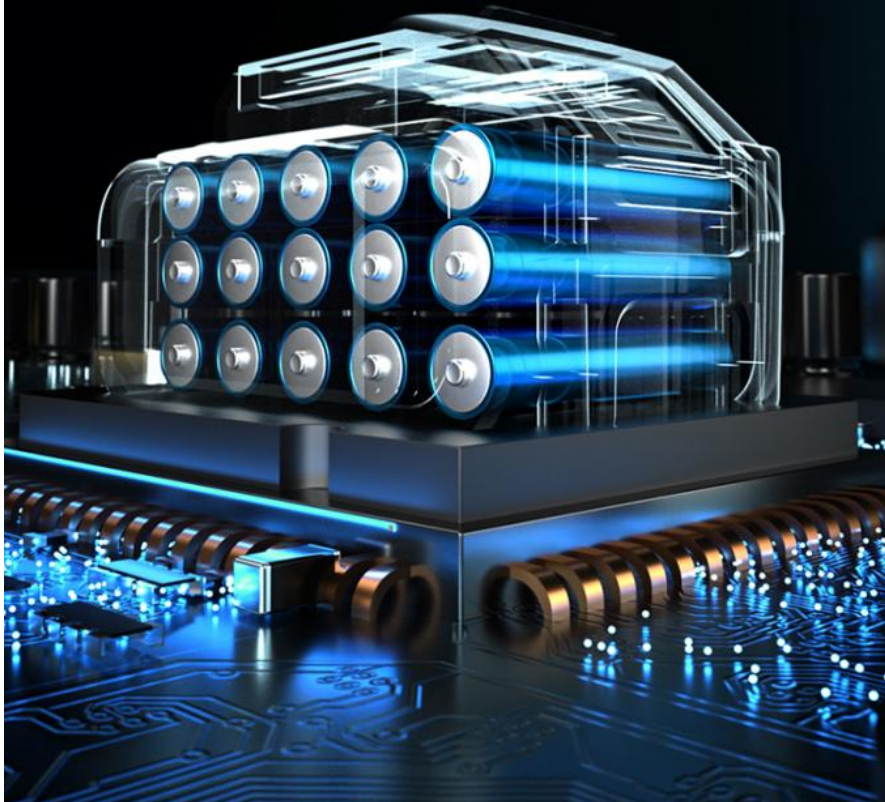



### LED rescue light

ILLUMINATION: HIGH-BRIGHTNESS  
LED ILLUMINATION CAN ALSO SEND  
SOS DISTRESS SIGNALS



### Cooling fan

THE BUILT-IN COOLING  
FAN DESIGN ENSURES A GOOD  
WORKING ENVIRONMENT  
FOR COMPONENTS



### Sealed dust cap

WINDPROOF SAND, WATERPROOF  
ANTI-FALSE TOUCH, PROTECT THE  
INTERFACE FROM DAMAGE




### Independently controlled switch




IT IS CONVENIENT TO CUT  
OFF POWER INDEPENDENTLY  
AND ENSURE THE SAFETY  
OF ELECTRICITY USE

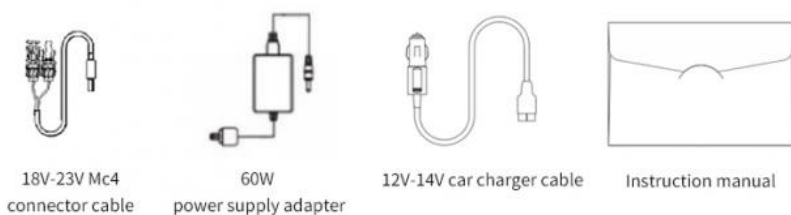

# Packing list



Choose the one that suits you  
with more peace of mind

					
Model	M300	M500 PRO	M1000	Q2400 mini	Q2400
Product capacity	266.4Wh	499.5Wh	999Wh	1536Wh	2304Wh
Power(W)	300W	500W	1000W	2400W	2400W
weight(kg)	About 3.95kg		About 8.9kg	About 20kg	About 24kg
Travel advice	Short distance (1-2 days+Travel)	Long distance road trip (5 days+Travel)	Long-distance road trip (5 days+Travel)	Long-distance road trip (5 days+Travel)	Long-distance road trip (5 days+Travel)
Use the device recommend According to the device Power selection)	Home emergency small household appliances, digital products, long- distance self-driving tours outdoor camping lighting, etc.	Home emergency small household appliances, digital products, long- distance self-driving tours outdoor camping lighting, etc.	Home emergency small household appliances, digital products, long- distance self-driving tours outdoor camping lighting, etc.	Home emergency small household appliances, digital products, long- distance self-driving tours outdoor camping lighting, etc.	Home emergency small household appliances, digital products, long- distance self-driving tours outdoor camping lighting, etc.
Size	273*181*244mm	328*221*263mm	328*221*263mm	410*290*290mm	410*290*290mm



MINKO (SZ) TECHNOLOGY CO., LIMITED



+8613539872669



yumiko@szminko.com



evstationcharger.com

309 West Lake Industrial Zone, Cuishan Road, Dongxiao Street, Luohu District, SZ

